

# KU 01, KU 03, KU 04

KU 01 G.22 Black

## Contact

Productline Infrastructure  
Phone: +31 10 248 3444  
verkoop@nexans.com

Nexans ref.: 10038102

Unscreened hook up wires, pairs and triples

## DESCRIPTION

### APPLICATIONS

Internal wiring in electronic equipment.


### CONSTRUCTION

#### BASE CORE : KU 01

1. CONDUCTOR  
stranded annealed tinned copper wires
2. INSULATION  
ethylene and tetrafluorethylene copolymer (E.T.F.E).

#### KU 03 and KU 04

3. LAY UP  
2 or 3 base cores.

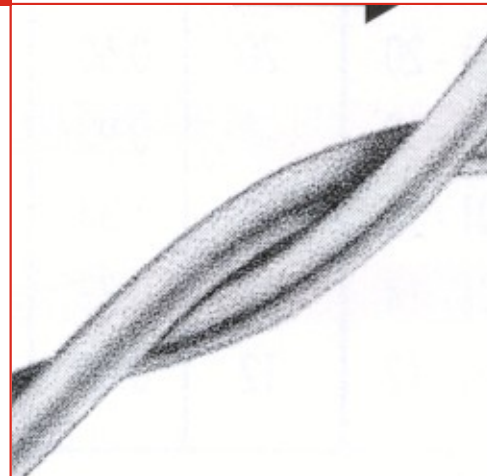

### STANDARDS

**National** NF C 32-070/C1;  
NF C 32-070/C2; NF C 93-524



Cable flexibility  
**Flexible**



Operating temp.  
-55 .. 150 °C



RoHS compliant  
**Yes**

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 8/22/17 [www.nexans.nl](http://www.nexans.nl) Page 1 / 2

# KU 01, KU 03, KU 04

KU 01 G.22 Black

## Contact

Productline Infrastructure  
Phone: +31 10 248 3444  
verkoop@nexans.com

## CHARACTERISTICS

### Construction characteristics

Conductor material	Tinned annealed copper
Insulation	ETFE

### Electrical characteristics

Maximum operating voltage	600 V
---------------------------	-------

### Mechanical characteristics

Cable flexibility	Flexible
-------------------	----------

### Usage characteristics

Operating temperature, range	-55 .. 150 °C
RoHS compliant	Yes