



ASSEMBLY INSTRUCTION

NL4FX / NL4FRX





speakON® SPX Series | Lockable Loudspeaker Connector

IMPORTANT SAFETY INSTRUCTION

Electrical Rating acc. UL & CSA:
USR: 40A/250V, CNR: 25A/250V

“CAUTION: NOT FOR INTERRUPTING CURRENT”

“ATTENTION: NE PAS UTILISER POUR COUPER LE COURANT”

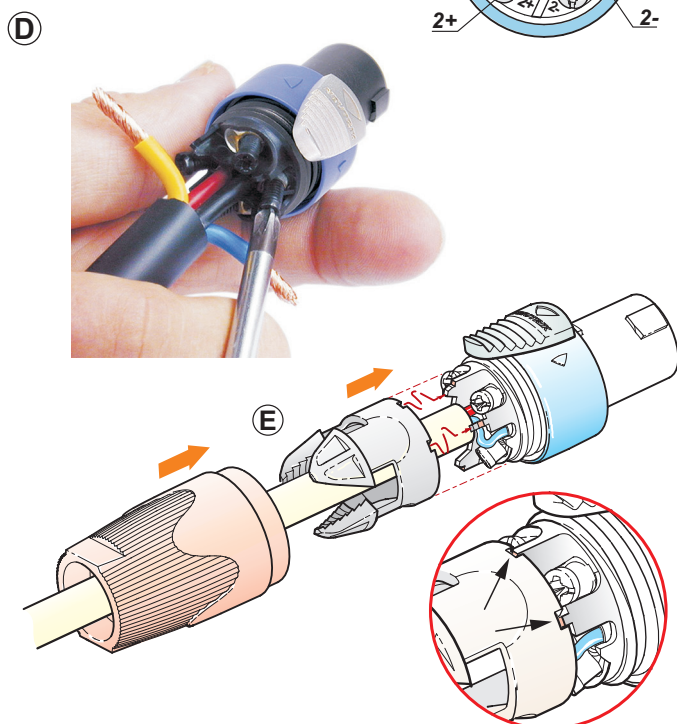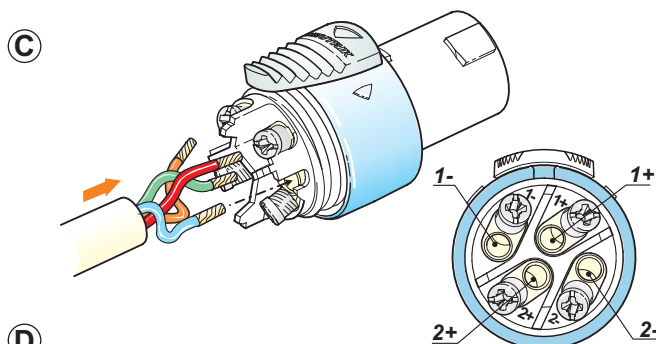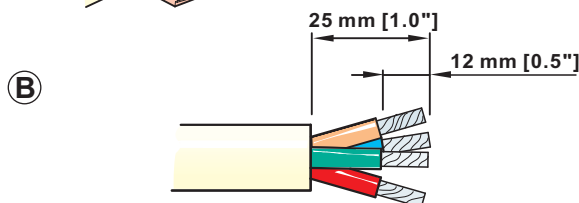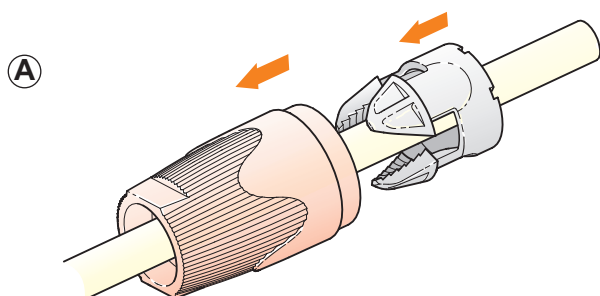

Assembly of the Connector:

Ⓐ Place bushing and chuck over cable.

Ⓑ Prepare cable as shown.

Important is the stripping length of 25 mm and 12 mm.

Ⓒ Insert wires into terminals and secure clamp terminals with screw driver (Pozidrive®).

Ⓓ For easy wiring especially on big cables, first screw on the inner contacts 1+ and 2+ and afterwards the outer contacts 1- and 2- !

Ⓔ Push chuck up to housing .

Important: Align the chuck by positioning the nose into the recess.

Ⓕ Tighten the bushing


INFO to the screw driver:



DO NOT USE!


Pozidrive #1

Philips

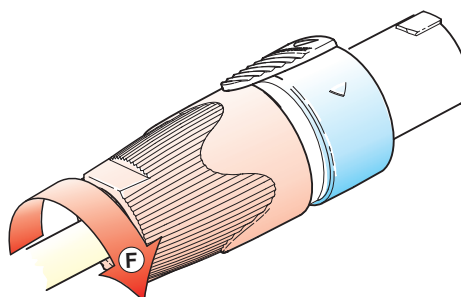




Assembly of the Conversion Kit:

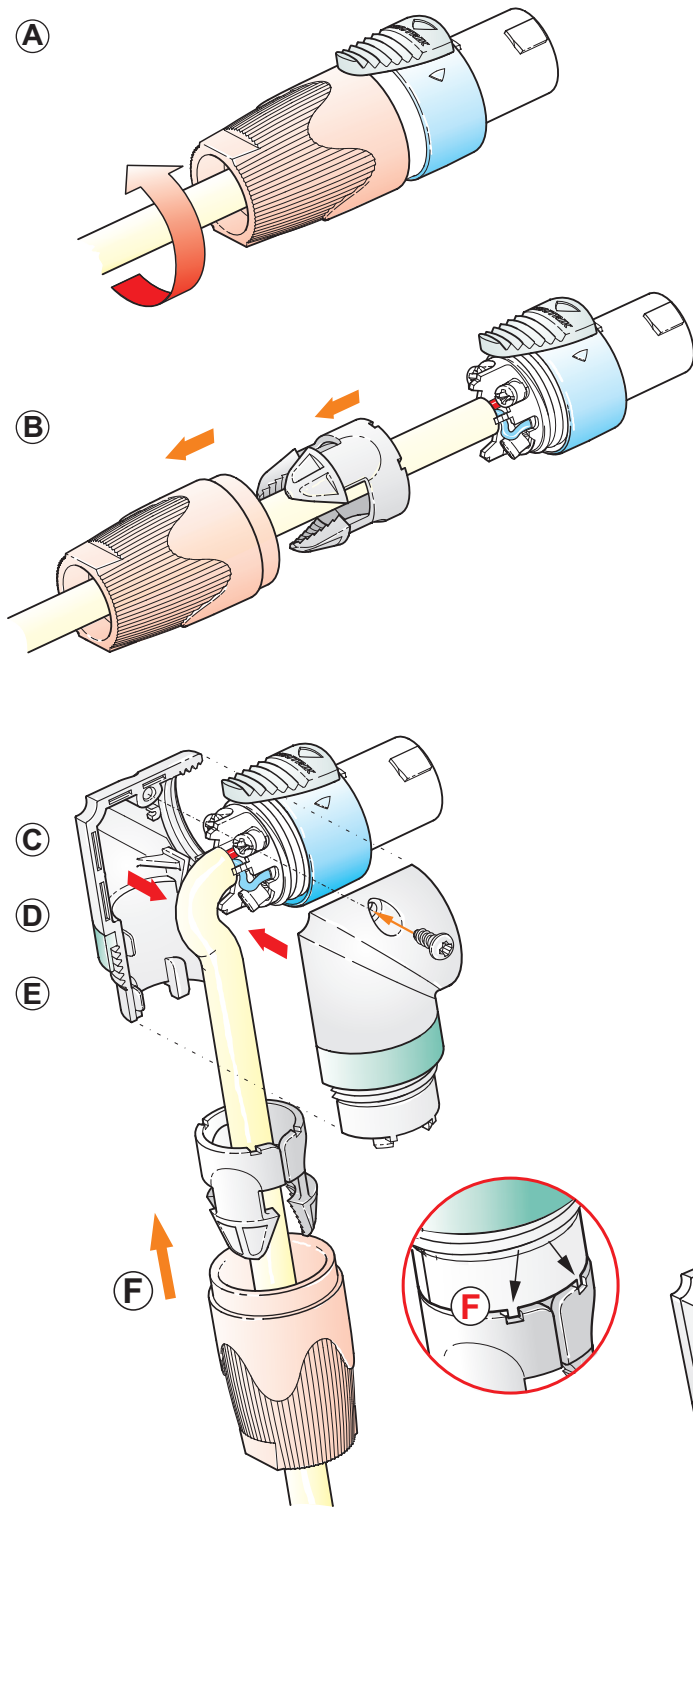

- A** Open the bushing.
 - B** Slide the bushing and the chuck back.
 - C** Bend the cable as shown.
 - D** Position the two conversion shells to fit on the connector thread.
 - E** Press together and fix by screw.
 - F** Slide the chuck onto the housing and fasten the bushing.
- Important:** Align the chuck by positioning the nose into the recess.

Handling:

Engagement:

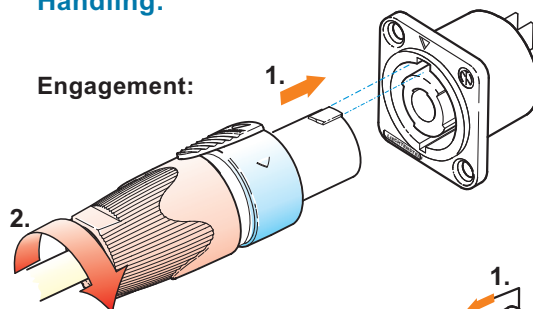

Separation:

