


UNIT: mm

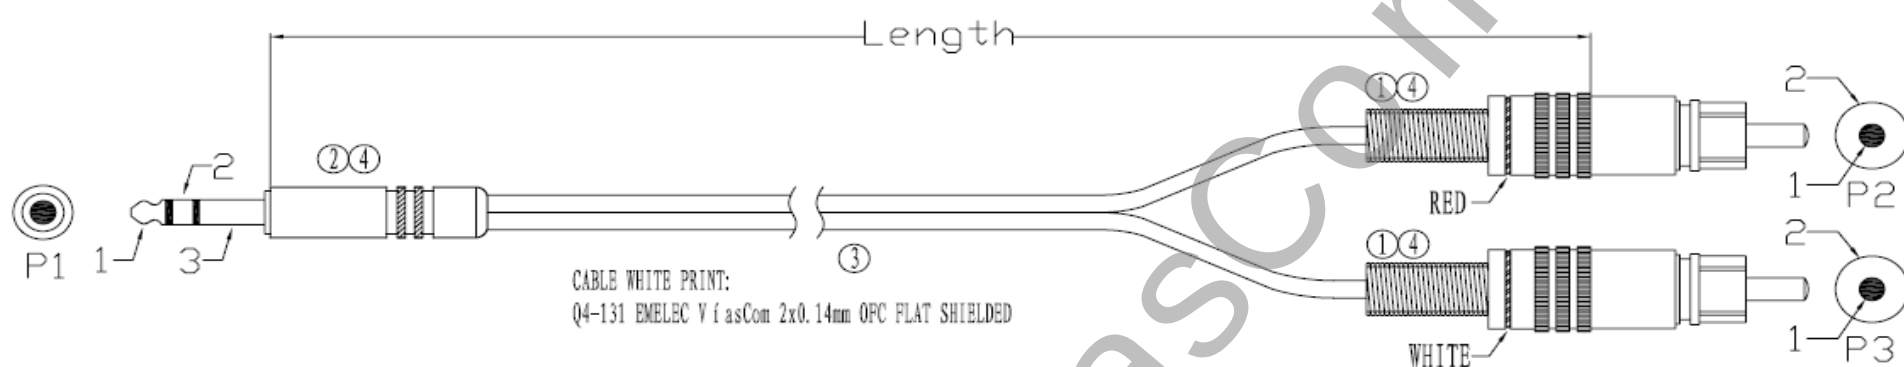

| EMELEC P/N | Length (mm) | COLOR BOX (mm) | WINDING L  |
|------------|-------------|----------------|------------|
| EQ660500S  | 1000 ± 30   | 90*60*10       | 260 ± 20mm |
| EQ660503S  | 3000 ± 30   | 90*60*10       | 280 ± 20mm |
| EQ660505S  | 5000 ± 50   | 120*90*12      | 300 ± 20mm |
| EQ660510S  | 10000 ± 80  | 150*90*25      | 320 ± 20mm |

| PIN ASSIGNMENT |          |            |
|----------------|----------|------------|
| P1             | P1 (RED) | P2 (WHITE) |
| 1              | 1 RED    |            |
| 2              |          | 1 WHITE    |
| 3              | 2        | 2 DRAIN    |

NOTE:

1. Open/Short test: 100%;
2. Conductor Resistance: 3 ohm;
3. Insulation Resistance: 10M ohm;
4. Hi-Pot: 400V/DC;

| ④   | TUBE  | 7     | CLEAR OD: 3.0mm L=10 ± 2mm                                                     |
|-----|-------|-------|--------------------------------------------------------------------------------|
| ③   | CABLE | 1     | Q4-131 BLACK 0.14mm <sup>2</sup> [(18/0.1BC)/1C+(40/0.1BC)/S]*2F OD: 3.8*7.6mm |
| ②   | CONN  | 1     | JACK 3.5STEREO MALE(EQ9045/B)                                                  |
| ①   | CONN  | 1+1   | MALE RCA CABLE CONNECTOR SOLIDER TYPE WITH RED AND WHITE RING (EQ9026/BR-BW)   |
| NO. | NAME  | Q' TY | SPECIFICATION                                                                  |

|                             |        |             |                |
|-----------------------------|--------|-------------|----------------|
| <b>EMELEC VíasCom, S.A.</b> |        |             |                |
| DRAWN BY                    | LYNDON | DARWING NO. | VG/LJQ-006-018 |
| CHECKED BY                  |        | CUSTOMER    |                |
| APPROVAL BY                 |        | ITEM NO.    | EQ6605XXS      |
| DECIDE BY                   |        | DATE        | 2013.03.28     |
| VERSIONS/EDITION            | A/1    | PROJECTION  |                |