


UNIT: mm

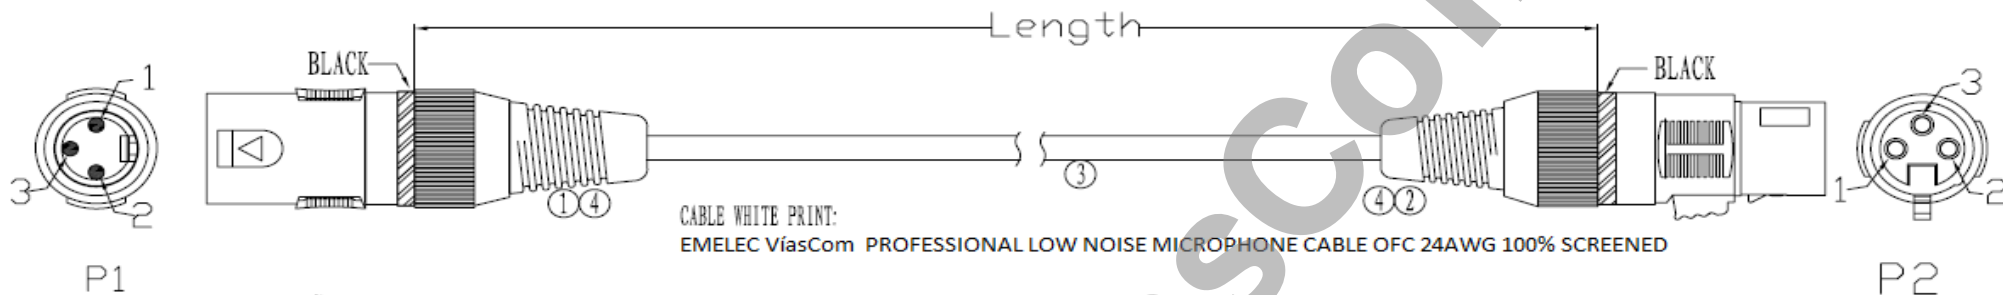

EMELEC P/N	Length (mm)	COLOR BOX (mm)	WINDING L
EQ630400S	500 ± 25	90*60*10	260 ± 20mm
EQ630401S	1000 ± 30	90*60*10	260 ± 20mm
EQ630402S	2000 ± 30	90*60*10	260 ± 20mm
EQ630403S	3000 ± 30	120*90*12	280 ± 20mm
EQ630405S	5000 ± 50	120*90*12	300 ± 20mm
EQ630410S	10000 ± 80	150*90*25	320 ± 20mm
EQ630415S	15000 ± 100	150*90*25	350 ± 20mm
EQ630420S	20000 ± 100	150*90*25	400 ± 20mm

PIN ASSIGNMENT

P1	P2
1	1 DRAIN
2	2 RED
3	3 WHITE

NOTE:

1. Open/Short test: 100%;
2. Conductor Resistance: 3 ohm;
3. Insulation Resistance: 10M ohm;
4. Hi-Pot: 400V/DC;

④	TUBE	6	CLEAR OD: 3.0mm L=10 ± 2mm
③	CABLE	1	EMELEC VíasCom PROFESSIONAL LOW NOISE MICROPHONE CABLE OFC 24AWG 100% SCREENED
②	CONN	1	FEMALE XLR CABLE CONNECTOR SOLIDER TYPE WITH BLACK RING (EQ9006/B)
①	CONN	1	MALE XLR CABLE CONNECTOR SOLIDER TYPE WITH BLACK RING (EQ9001/B)
NO.	NAME	Q' TY	SPECIFICATION

EMELEC VíasCom, S.A.			
DRAWN BY	LYNDON	DARWING NO.	VG/LJQ-006-001
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	EQ6304XXS
DECIDE BY		DATE	2015-3-24
VERSIONS/EDITION	A/2	PROJECTION	