

技术参数

TECHNICAL SPECIFICATION

客户编号

(Customer code.):

产品型号

(Product Model)



MMACC24

序号 NO.	项 目(ITEM)	规 格(SPECIFICATION)	备 注(NOTE)
1	额定电压/频率 Power source voltage/Frequency	/	
2	输出电压 Output voltage	/	
3	电机额定电压 Rated voltage	24VDC	
4	电机额定电流 Rated current	2ADC	
5	电机额定功率 Rated power	50W	
6	空载电流（伸出） No load current (extend)	≤0.7A	
7	空载电流（收回） No load current (retract)	≤1.5A	
8	负载形式 Type of load	推/拉(Push/Pull)	
9	最大推力 Max.push force	6000N	
10	最大拉力 Max.pull force	4000N	
11	防护等级 Protection category	IP44	
12	操作模式 Duty cycle	S2/18 2min ON 18min off	
13	最小安装距 Min.mounting dimension	350±2mm	
14	最大安装距 Max.mounting dimension	550±2mm	
15	行程(Stroke)	200mm	
16	空载速度No load speed	5mm/s	
17	震动 Vibration	手感无明显震动 Feel no vibration by hand	
18	噪音 Noise	≤55dB(A)	300mm测试距离 (Test distance:300mm)
19	外形及安装尺寸 Outline dimension	见外形图 Refer to the drawing	
20	外观Appearance	无破损，污秽，锈蚀等外观缺陷 No damage, contanination or corrosion	
21	寿命(Life cycle)	>10000次(>10000 times)	工作循环：10% (Duty cycle:10%)

制定/日期
Date/Draft:

复核/日期
Date/Check:

批准/日期
Date/Approve:

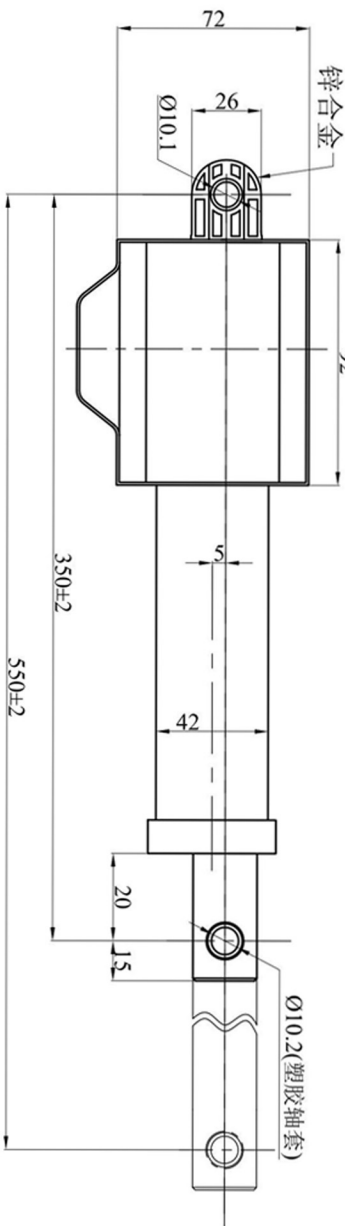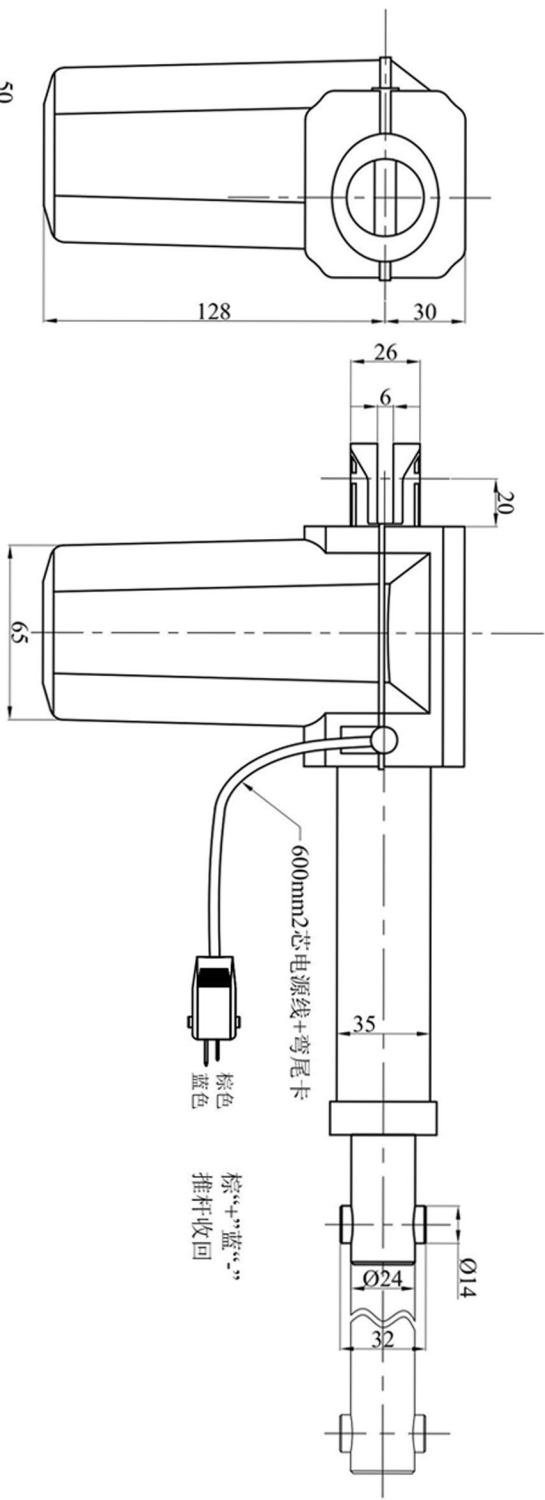

- 技术说明:
1. 电动杆行程为200mm,空载行走速度为5mm/s.
 2. 电动杆工作电压为24VDC,最大工作电流为5.0A,最大推力为6000N.
 3. 单位:mm.

					CONFIRMED & ACCEPTED BY CUSTOMER Company, Chop & Signature			
					TITLE: 直顶电动推杆 (Direct-drive linear actuator)			
					PART NO: MMACC24			
					DES'D			
					CHK'D			
					REV'D			
					APP'D			
					SCALE			
								
REV.		WAS		DATE	DES'D	APP'D		