



Size : 240*124*65mm

Features:

- AC input range selectable by switch
- Built-in EMI filter, tiny ripple
- Protections short circuit/overload/over voltage
Over temperature
- Forced air cooling by built-in DC fan
- 43,000 hours of continuous operation at 25°C
- 100% full load burn-in test
- Compliance to IEC/EN60335-1 (PD3) and
IEC/EN61558-1,2-16 suitable for home appliance
- 2 years warranty

SPECIFICATION



CE RoHS

Model		SA5C600W12	SA5C600W15	SA5C600W24	SA5C600W48
OUTPUT	DC VOLTAGE	12V	15V	24V	48V
	RATED CURRENT	50A	40A	25A	12.5A
	CURRENT RANGE	0~50A	0 ~ 40A	0 ~ 25A	0 ~ 12.5A
	RATED POWER	600W	600W	600W	600W
	RIPPLE NOISE(Max)	200mVp-p	200mVp-p	240mVp-p	240mVp-p
	VOLTAGE ADJ.RANGE	10.8 ~ 13.2V	13.5~16.5V	21.6~ 26.4V	43.2 ~ 52.8V
	VOLTAGE TOLERANCE	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP,RISE TIME	1000ms,50ms			
INPUT	HOLD UP TIME (Typ.)	20ms (full load)			
	VOLTAGE RANGE	85 ~ 132VAC /170~264VAC by switch 240~370VDC			
	FREQUENCY RANGE	47 ~ 63Hz			
	EFFICIENCY(Typ.)	82%	84%	84%	86%
	AC CURRENT(Typ.)	6.4A/115VAC 3.2A/230VAC			
	INRUSH CURRENT(Typ.)	COLD START: 30A/115V 60A/230V			
PROTECTION	LEAKAGE CURRENT	<3.5mA / 240VAC			
	OVERLOAD	115 ~ 135% rated output power Protection tye:Hiccup mode,recovers automatically after fault condition is removed			
	OVER VOLTAGE	13.8 ~ 16.2V	18.8 ~ 21.8V	27.6 ~ 32.4V	55.2 ~ 64.8V
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to derating curve)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP.,HUMIDITY	-20 ~ +85°C, 20 ~ 95% RH			
	TEMP.COEFFICIENT	±0.03%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 2G 10 min/1cycle,60min.each X Y Z axes			
SAFETY	SAFETY STANDARDS	GB4943.1, EN 60950.1 APPROVED			
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC			
	EMC EMISSION	EN61000-3-2:2014/EN61000-3-3:2013			
	EMC IMMUNITY	EN 55032:2015/EN55035:2017/60950-1			
OTHERS	MTBF	≥720.6K hrs MIL-HDBK-217F(25°C)			
	DIMENSION	240*124*65mm (L*W*H)			
	PACKING	1.4Kg; 12pcs/16.8Kg/0.9CUFT			
NOTE		1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple noise are measured at 20MHz of bandwidth by using a 12" twisted pair -wire terminated with a 0.1uf and 47uf parallel capacitors. 3. Tolerance includes set up tolerance, line regulation and load regulation. 4. Derating output is required under low input voltage. Please refer to the derating curve for details. 5. The power supply should be considered as a part of the components in the system. All EMC tests will test the test samples on a metal iron plate with a thickness of 1mm, a length of 360mm width of 360mm.			


SA5C600W.. / Single Output Series

Mechanical Specification


Terminal Pin No.Assignment:

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4-6	DC OUTPUT -V
2	AC/N	7-9	DC OUTPUT +V
3	FG		

Unit:mm

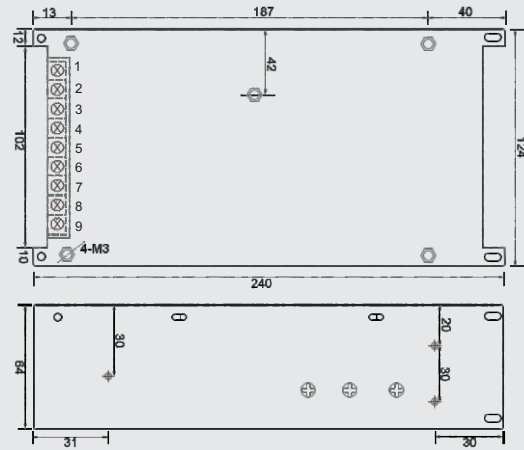

Block Diagram

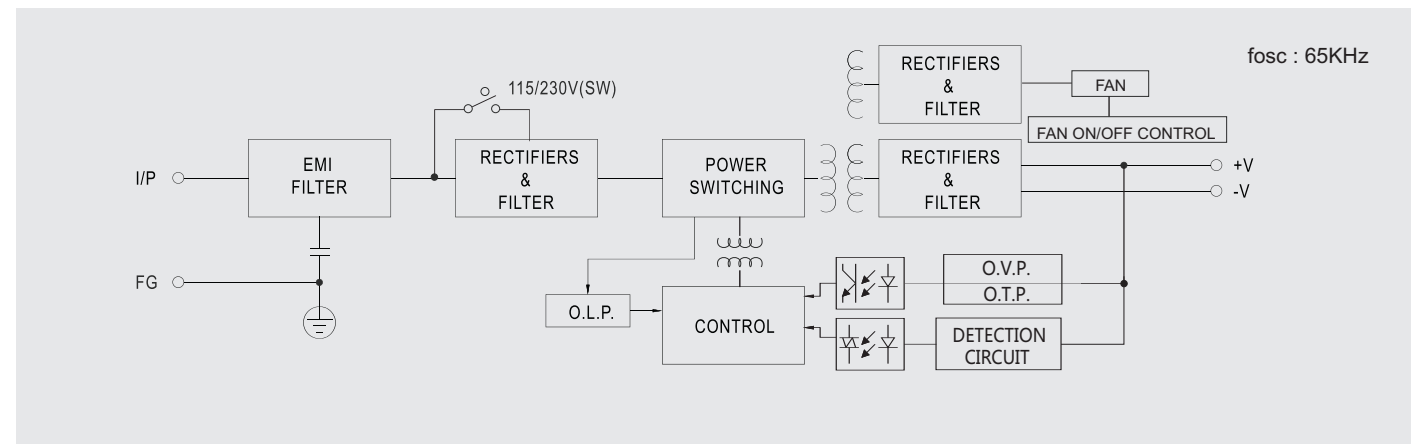

Derating Curve

Static Characteristic

