




BA11707



12V7.0Ah

PHYSICAL SPECIFICATION

Nominal Voltage Nominal Capacity (20HR)		12V 7.0Ah
Dimension	Length	151±1mm (5.94 inches)
	Width	65±1mm (2.56 inches)
	Container Height	95±1mm (3.74 inches)
	Total Height	101±1mm (3.98 inches)
Weight		Approx. 1.97Kg (4.34lbs)
Standard Terminal		Fasten Tab No.187E

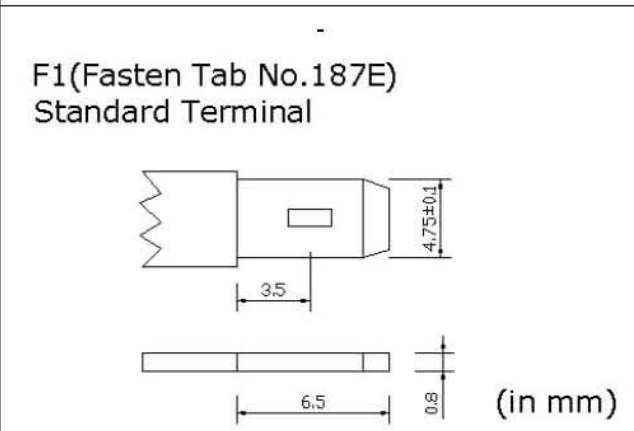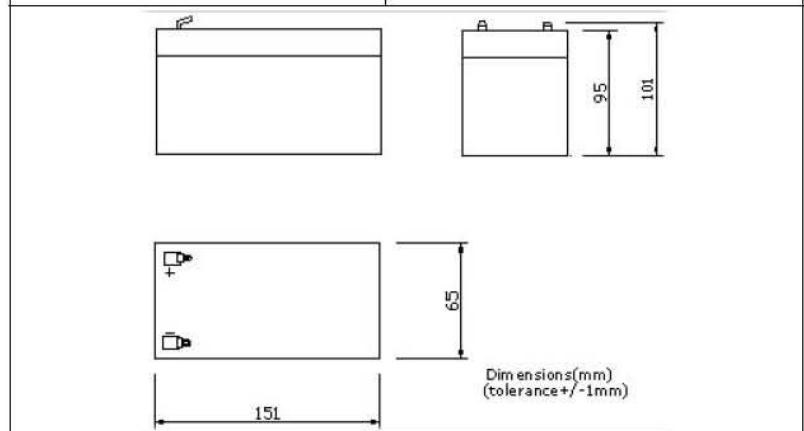

ELECTRICAL SPECIFICATION

Characteristics		
Capacity	20 hour rate (0.325A)	6.5Ah
	10 hour rate (0.585A)	0.59Ah
	5 hour rate (1.105A)	5.53Ah
	3 hour rate (1.625A)	4.88Ah
	1hour rate (3.9A)	3.9Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Internal Resistance		Full charged battery (25°C,77 °F) 25mΩ
Constant Voltage Charge	Cycle	Initial Charging Current less than 1.95A Voltage 14.4~15.0V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

