




版次 (Version)	変更内容 (Rev. Content)	変更者 (Change Person)

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/5A	250V/10A
压线范围 (Wire Range)	20~18AWG	1.5mm²
工频耐压 (Frequency Voltage)	AC 2000V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤20mΩ	
剥线长度 (Stripping Length)	9~10mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
弹片 (Spring)	不锈钢 (Stainless)	

订购方式/HOW TO ORDER:

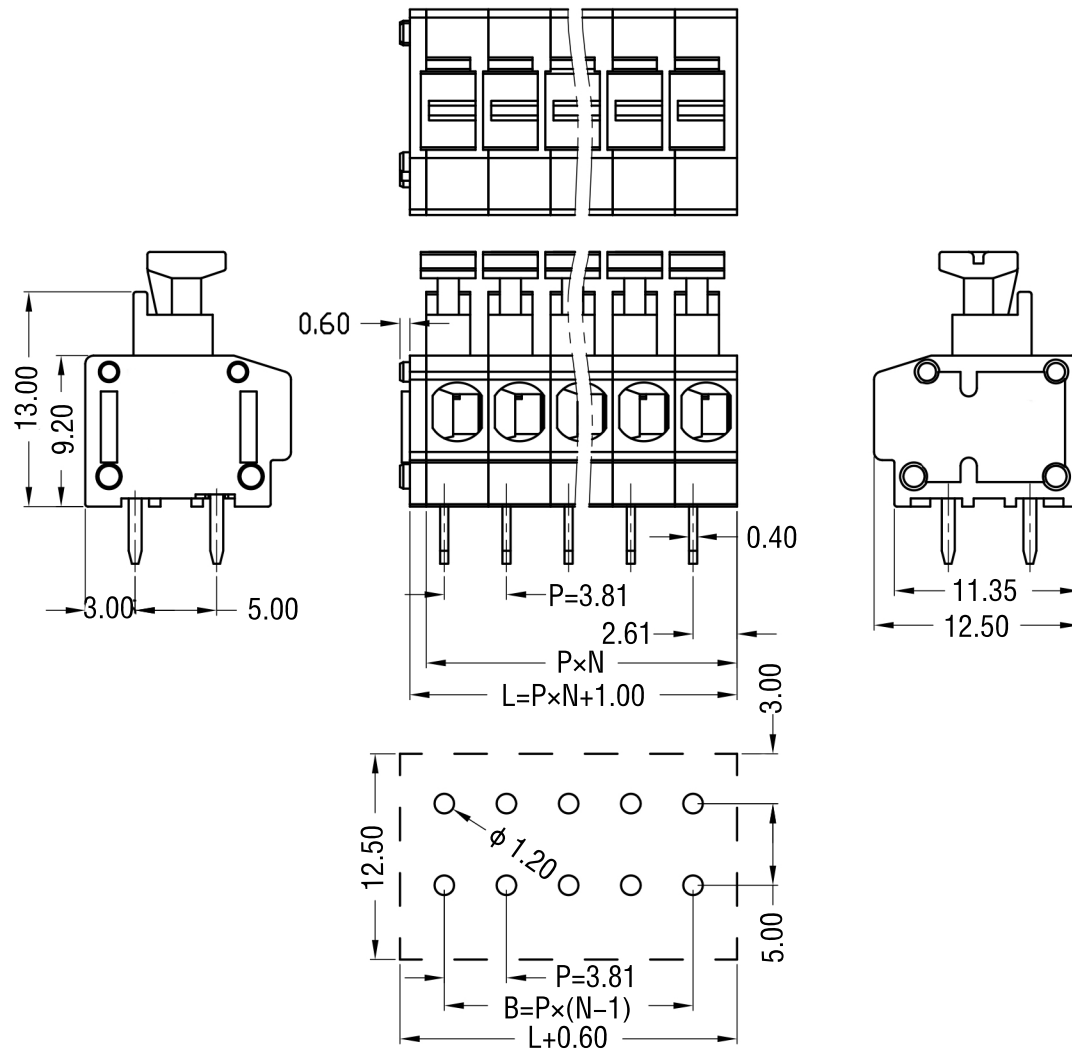

型号
Model

端子间距
Pitch

极数
Pole

0	未定义No definition
1	单倍间距Single pitch
2	双倍间距Double pitch

颜色Color

10	灰色Grey	40	绿色Green	70	透明Transparent
20	蓝色Blue	50	橙色Orange	80	黄色Yellow
30	黑色Black	60	红色Red	90	白色White

P=3.81mmN为孔位数(N for hole digits),有效位数为(Significant Digits): 01P,02P~XXP												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	9.12	12.93	16.74	20.55	24.36	28.17	31.98	35.79	39.60	43.41	47.22	51.03
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	...
L	54.84	58.65	62.46	66.27	70.08	73.89	77.70	81.51	85.32	89.13	92.94	
B	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63	

 慈溪市中益电子器材厂 ZHONGYI CIXI ZHONGYI ELECTRONICS FACTORY				公差范围(Tolerance Range)	
型号(Type): HQ235-3.81				150~	±1.50
				60~150	±1.00
				30~60	±0.60
				6~30	±0.40
核准(Approval):		图号(Drawing NO.):		0~6	±0.25
审核(Audit):		单位(Units):mm	页码(Page): 1/1	角度 (Angle)	X X.X ±2° ±1°
设计(Design):		比例(Scale):FULL		版次 (Version): TO	