


CUM

Blocco unico
Monobloc

Single block
Einzelblock

Poli Poles 2/36 (5)
Póles Polzahl 2/18 (10)

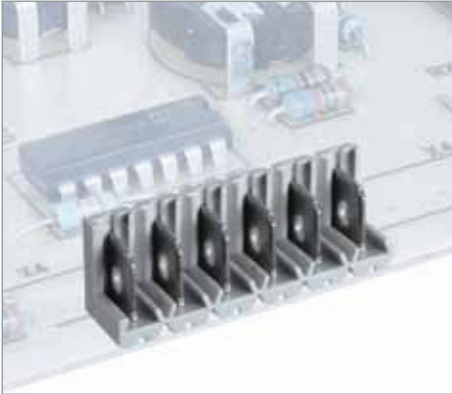

5	10
250	500
16	

130	
PC - UL 94 V0	

V	A	mm ² /AWG
250 (5)	500 (10)	16
250 (5)	500 (10)	16
300	14	24 ÷ 12

min 2 - max ...	
VE	
D/B4	

Versione
Version


P	L (mm)
5	5 x p
10	(10 x p) -5

CPM

Blocco unico
Monobloc

Single block
Einzelblock

Poli Poles 2/24

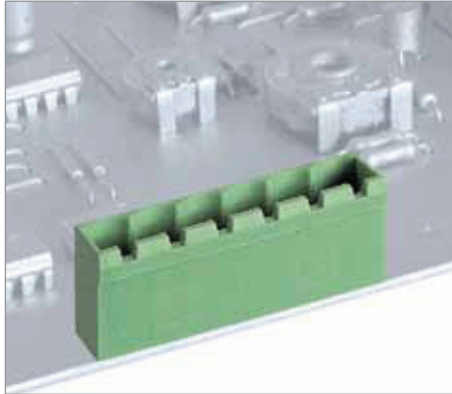

5	5,08
320	
20	

160	
PA - UL 94 V0	

V	A	mm ² /AWG
320	20	0,2 ÷ 2,5
320	20	0,2 ÷ 2,5
300	12	24 ÷ 12

min 2 - max 24	
VE	
D/B4	

Versione
Version

P	L (mm)	X
5	(5 x p)+1,2	3,1
5,08	(5,08 x p)+1,2	3,14

Versione
Version


SQ

CPM..A

Blocco unico
Monobloc

Single block
Einzelblock

Poli Poles 2/24

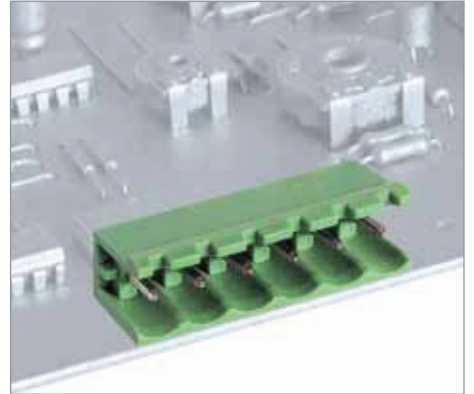

5	5,08
320	
20	

160	
PA - UL 94 V0	

V	A	mm ² /AWG
320	20	0,2 ÷ 2,5
320	20	0,2 ÷ 2,5
300	12	24 ÷ 12

min 2 - max 24	
VE	
D/B4	

Versione
Version

A

P	L (mm)
5	5 x p
5,08	5,08 x p

Versione
Version

SQA

B4