



UNIT: mm

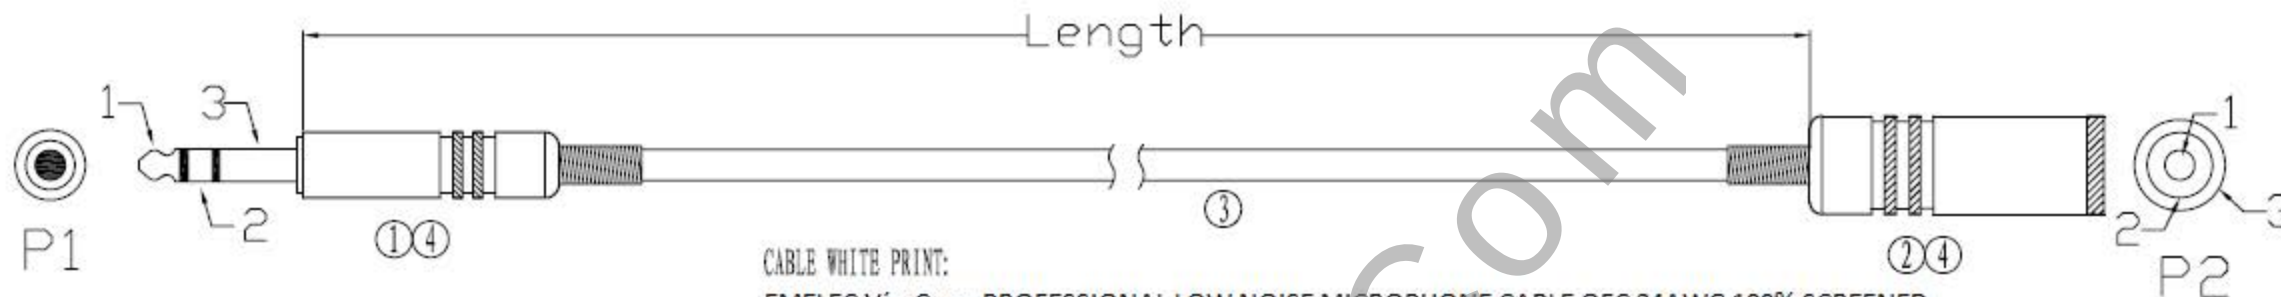

CABLE WHITE PRINT:
EMELEC VíasCom PROFESSIONAL LOW NOISE MICROPHONE CABLE OFC 24AWG 100% SCREENED

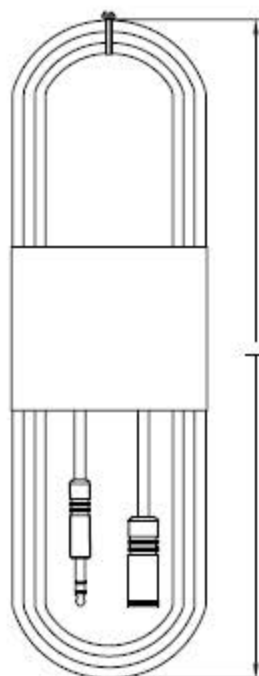

EMELEC P/N	Length (mm)	COLOR BOX (mm)	WINDING L
EQ677503S	3000 ± 30	90*60*10	260 ± 20mm
EQ677505S	5000 ± 50	120*90*12	280 ± 20mm
EQ677510S	10000 ± 80	120*90*12	320 ± 20mm

PIN ASSIGNMENT			
	P1		P2
RED	1		1
WHITE	2		2
DRAIN	3		3

NOTE:

1. Open/Short test: 100%;
2. Conductor Resistance: 3 ohm;
3. Insulation Resistance: 10M ohm;
4. Hi-Pot: 400V/DC;

NO.	NAME	Q' TY	SPECIFICATION
④	TUBE	6	CLEAR OD: 3.0mm L=10 ± 2mm
③	CABLE	1	EMELEC VíasCom PROFESSIONAL LOW NOISE MICROPHONE CABLE OFC 24AWG 100% SCREENED
②	CONN	1	JACK 3.5STEREO FEMALE (EQ9046/B)
①	CONN	1	JACK 3.5STEREO MALE (EQ9051/B)

EMELEC VíasCom, S.A.			
DRAWN BY	LYNDON	DRAWING NO.	VG/LJQ-006-022
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	EQ6775XXS
DECIDE BY		DATE	2013. 03. 28
VERSIONS/EDITED	A/1	PROJECTION	