

Approval & Compliance



Product information

Three-phase three-wire AC filter-FIBA050

Description

Simple installation, bolt mode link, customizable, using single-pole filter circuit design, strong anti-interference, good low frequency performance, can be used for high current equipment.

Technical Data

Rated Voltage	380/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(Line/line) 2750VAC(Line/ground)
Insulation Resistance	>50M @500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Features

Rated current : 10A

Strong anti-jamming

Low frequency performance is good, can be used for high current equipment

Can be customized upon request

Applications

Power equipment such as UPS

General electronic equipment


Power monitoring equipment

Measuring equipment


Performance Indicator



Rated Current [A]

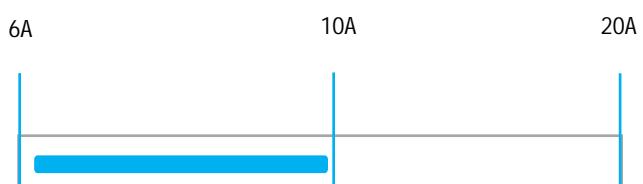


Typical Circuit Diagram

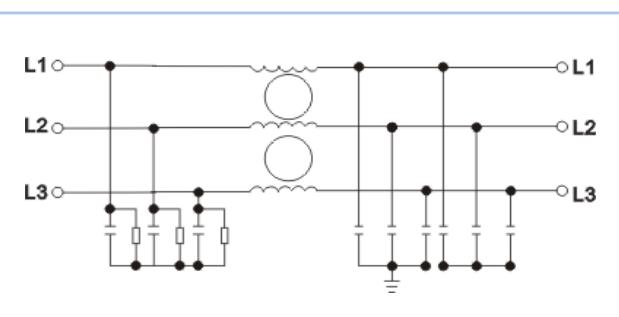


Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
FIBA050	10A	<2.0mA	C1	Bolt	Bolt	CE、ROHS	Parameter customization

Overall Dimension (±1mm)

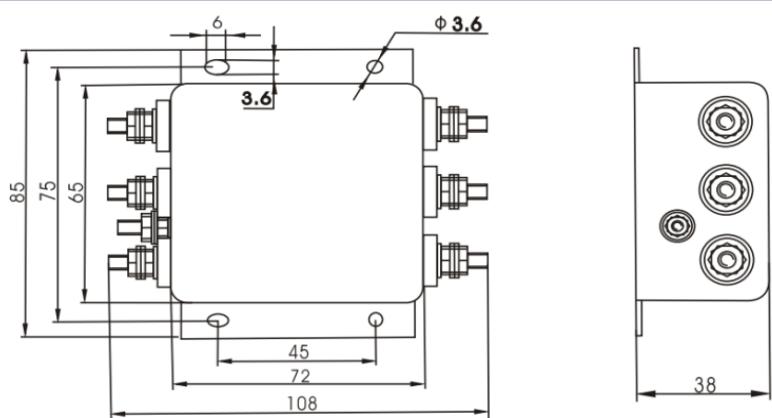

Insertion loss -(common mode)

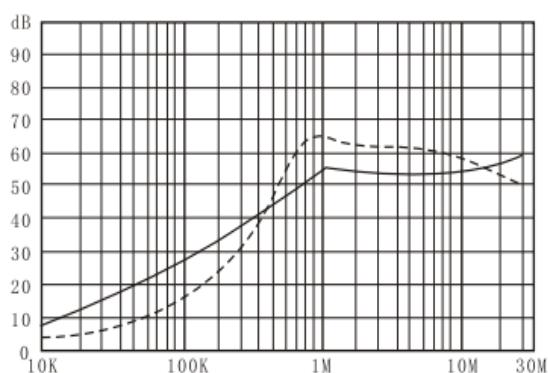

FIBA050