

Performance Specifications


		Measurement Range	Resolution	Accuracy
DC Voltage		6.000V/60.00V/600.0V	0.01mV	±(0.5%+2dig)
		1000V	1V	±(0.8%+2dig)
AC Voltage		6.000V/60.00V/600.0V	0.1mV	±(0.8%+3dig)
		750V	1V	±(1%+3dig)
DC Current	μA	60.00uA/600.0μA	0.01μA	±(0.8%+2dig)
	mA	60.00mA/600.0mA	0.01mA	±(0.8%+2dig)
	A	10.00A	0.01A	±(1.2%+3dig)
AC Current	μA	60.00uA/600.0μA	0.01μA	±(1%+3dig)
	mA	60.00mA/600.0mA	0.01mA	±(1%+3dig)
	A	10.00A	0.01A	±(1.5%+3dig)
Resistance		600.0Ω/6.000kΩ/60.00kΩ/600.0kΩ/6.000MΩ	0.1Ω	±(0.8%+2dig)
		60.00MΩ	0.01MΩ	±(2%+3dig)
Capacitance		60.00nF/600.0nF/6.000μF/60.00μF	0.01nF	±(2.5%+3dig)
		600.0μF/6.000mF/60.00mF	0.1μF	±(3%+5dig)
Frequency		9.999Hz/99.99Hz/999.9Hz/9.999kHz/99.99kHz/99.9kHz/9.999MHz	0.001Hz	±(0.8%+2dig)
Duty Ratio		0.1%~99.9% (typical value: Vrms=1V, f=1kHz)		±(1.2%+3dig)
		0.1%~99.9% (≥1kHz)	0.1%	±(2.5%+3dig)
Temperature		-50°C~+400°C	1°C	±(2.5%+3dig)
		-58°F~+752°F	1°F	±(4.5%+5dig)
Display		5999		
Frequency		(40-1000)Hz		
Shift Rate on DMM		3 times / s		

Bluetooth Module	√ (only in OW16B)	Auto-scale	√
True RMS	√	LCD Backlight	√
Diode Test	√	Automatic-manual Range Selection	√
		Input Protection	√
Auto Power-off	√	Input Impedance	≥10MΩ
On-off Warning	√	Safety Compliance	600V CATⅢ, 1000V CATⅡ
Low-battery Indicator	√	NCV	√
Data Hold	√	Dimension (W×H×D)	147.5 x 73.5 x 50(mm)
Relative Measurement	√	Weight (without package)	0.20 kg

Specifications subject to change without prior notice.

owon®
+ Meeting your needs

Bluetooth Digital Multimeter OW16A/OW16B

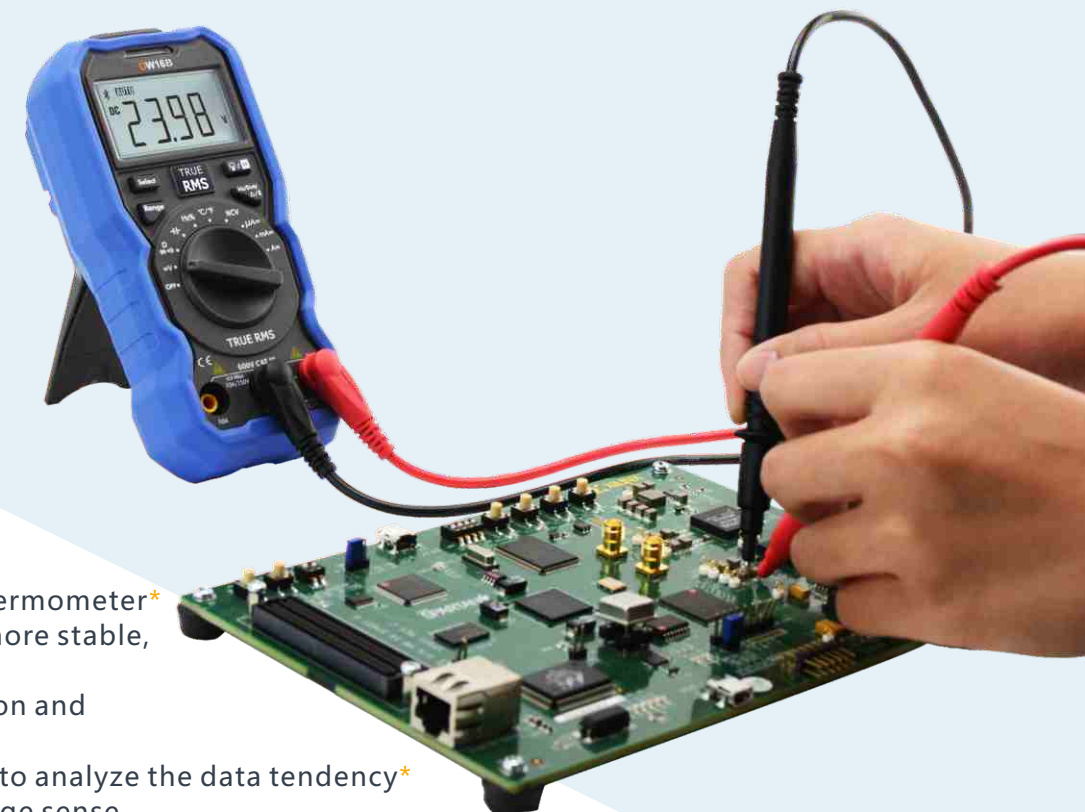

- + 3 5/6 digit resolution
- + Data Logger + Multimeter + Thermometer*
- + BLE 4.0 wireless transmission, more stable, less power consumption*
- + Support multi-devices connection and single-display monitoring*
- + Chart and Diagram mode helps to analyze the data tendency*
- + Support NCV non-contact voltage sense
- + Auto scale and True RMS test supported
- + Voice broadcast secures the test*
- + Build-in offline record function supports non-stop up to 7 days non-stop recording*
- + Widely supported on Android, iOS and Windows (needs optional Bluetooth adaptor) system.*
- + Easy to carry out with small body.

* Only for OW16B

Accessories

The accessories subject to final delivery.



Multimeter Lead



K-type Thermocouple



Manual



Alligator Clip (optional)

owon® created by **LILLIPUT®**

Fujian Lilliput Optoelectronics Technology Co., Ltd.

The Mansion of Optoelectronics, Hengsan Road
Lantian Industrial Zone, Zhangzhou 363005 P.R. China

Tel : +86.596.213.0430 **WWW.OWON.COM.CN**




mobile app accessible via scanning QR code




Bluetooth Digital Multimeter OW16A/OW16B

Portable design for easy carry ▶

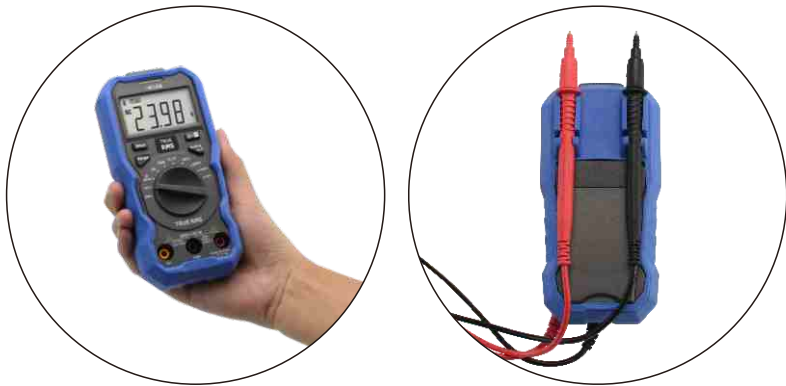

Support triode and temperature test ▶

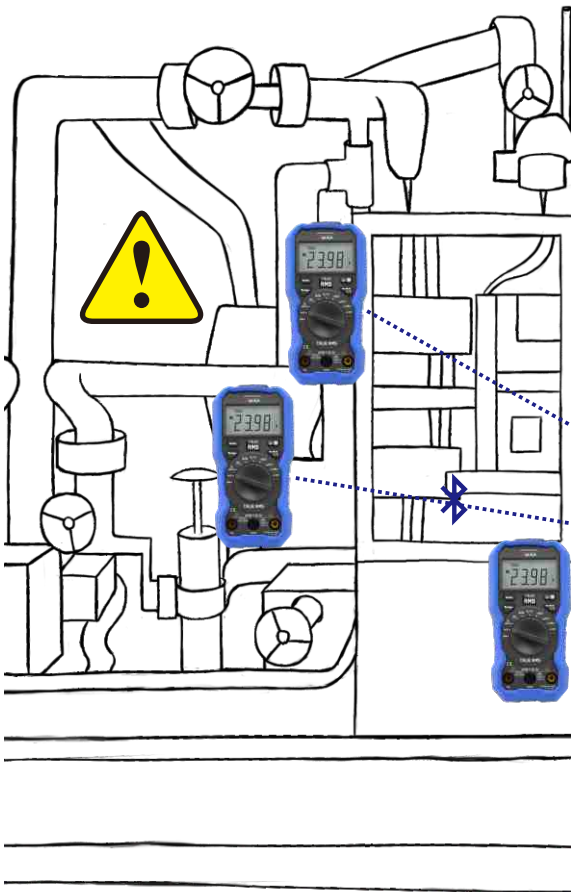

◀ BLE 4.0 wireless transmission, support multi-devices connection and single-display monitoring


One mobile end can connect with multiple multimeters, the test object is totally isolated with user to secure their life.




Not only a multimeter, also a data logger and thermometer.

Real time data are updated and recorded to end user device, no need to be in field. User can define the record time and sampling gap, data can be shown as chart and diagram, multi-devices connection supports data comparison.

User and test object are totally isolated, which secure the life

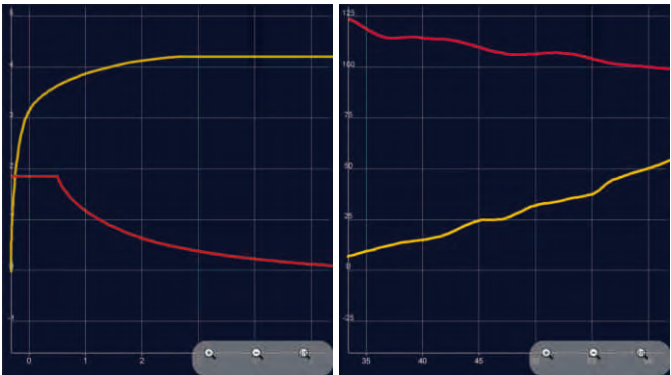

— current at input — voltage at input — current — temperature
the experiments upon the change of current and voltage when charging Li-ion battery
the experiments upon the current change of components under different temperature

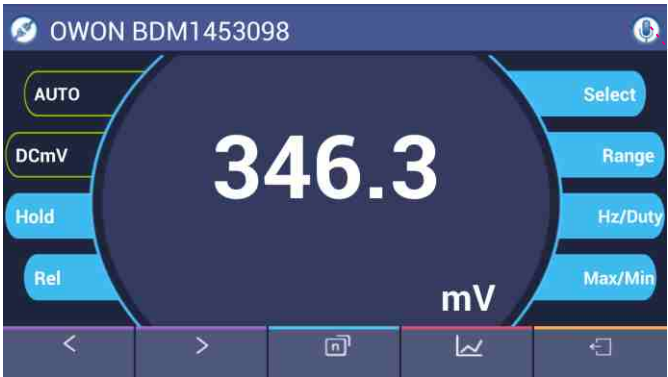

Voice broadcast secures the test



After installing the TTS voice pack on smartphone, the app supports voice broadcast. User can focus on wire connection without watching the display value. This assure the connection safety.

Build-in offline record function

No need to put the end device in field, multimeter will save the data in its memory. Use the smartphone to load the data when connected.

No.	Func	Value	Unit
19	DCmV	320.1	mV
20	DCmV	292.2	mV
21			
22			
23			
24			
25			
26			
27			

Open local file
Save data
Clear data
Setting
Exit

No.	Func	Value	Unit
19	DCmV	320.1	mV
20	DCmV	292.2	mV
21	DCmV	188.9	mV
22	DCmV	144.9	mV
23	DCmV	280.2	mV
24	DCmV	363.3	mV
25	DCmV	528.1	mV
26	DCmV	553.0	mV
27	DCmV	431.3	mV



Widely supported on Android, iOS, and Windows (needs optional Bluetooth adaptor) system.