

1

2

3

4



5

6

7

8

RoHS Compliant

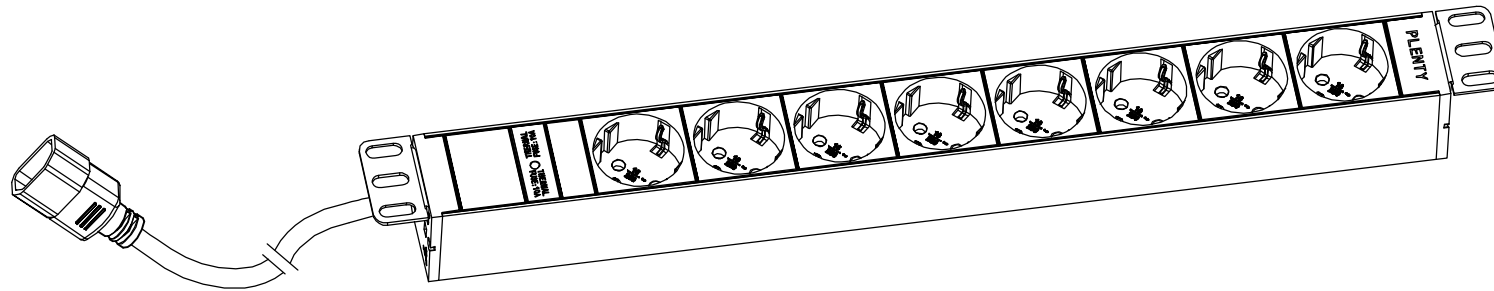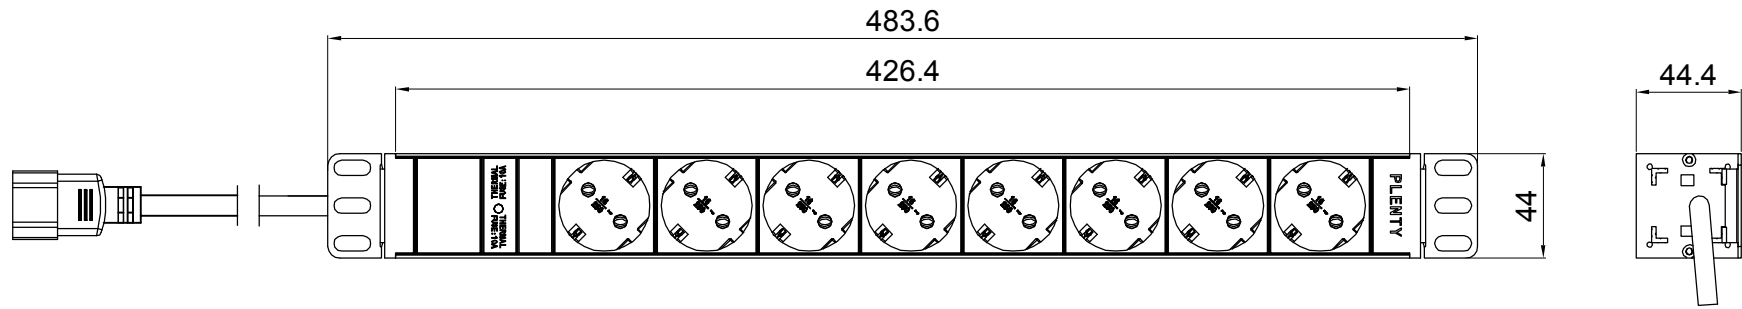

Basic Series

OUTPUT

OPERATING TEMPERATURE

(6) Schuko Socket Red Color RAL3000 (16A Rated)

0° to 60°C

Revisions

Rev

Description

Date

INPUT

BRANCH CIRCUITS

MOUNTING ACCESORIES

250VAC 10A 50HZ
C14 plug
3M H05VV-F3G1.0mm Power lead

(1) SANG MAO Thermal Fuse 10A

(2) 41 Bracket

DRAWING TYPE



(NO PERMISSION,NO CHANGING)

RN3004

unit=mm

Housing

Aluminium

Silver Oxidation

TECHNICAL STANDARD
1.IT11;
2.NO RUSTNESS
3.NO FLAW ON THE SURFACE

FILLET R0.5

ANGLE ±0.5°

FIRST ANGLE



SCALE 1:3

DATE 11-03-2015

1

2

3

6

7

8